

RING 408 PEL +



Low Cost & Reliable Desk Top Barcode Printer

Identify, monitor and manage assets, transactions and people with the highly efficient Ring 408 PEL+ Barcode Printer

**DIRECT THERMAL / THERMAL TRANSFER
BARCODE PRINTER**

**COMES WITH
PARALLEL,
SERIAL & USB
INTERFACES**



TRANSPORTATION
AND LOGISTICS



MANUFACTURING



RETAIL STORES



HOSPITALS



COURIER AND
PARCEL SERVICES



JEWELLERY
SHOPS



LIBRARIES AND
BOOK STORES



PARKING LOT



GARMENTS

**BILL PRINTING
4
FANTASY**

**1 SUPPORTS BOTH DIRECT THERMAL
AND THERMAL TRANSFER PRINTING**

**2 FAST PRINTING SPEED AT
4 INCHES PER SECOND**

**3 HIGH PRINT RESOLUTION
OF 203 DPI**

**4 MULTIPLE INTERFACE OPTIONS
OF PARALLEL, SERIAL & USB**


SPECIFICATIONS OF RING 408 PEL+

Model Name	408 PEL+
Print Speed	101.6mm/sec, 4"/sec
Resolution	203dpi
Print Width	108mm
Print Length	12mm to 1727mm
Print Method	Thermal Transfer / Direct Thermal
Media Width	25mm to 118mm
Media Type	Roll Stock (continuous or die cut), Fan Fold, Tag Stock
Supply Roll Capacity	125.0mm
Interface	Serial: Baud Rate 4800 ~ 38400, XON/XOFF, DSR/DTR
	Parallel: Bi-direction
	USB: V2.0
Media Thickness	.06mm to .25mm
Media Sensing	Label gap, black mark, and punch hole sensing, by auto sensing or program command setting
Ribbon	Industry standard : 25.4mm core diameter, 300m ribbon length – out side diameter of 68mm
Cabinet	Durable plastic with Black transparent media window
Bar Codes and 2 D codes	Code 39, Code 93, Code 128(Sub set A, B, C), UCC128, UCC/EAN-128, UPC A/E (add on 2&5), Interleaved 2 of 5,EAN128,EAN8/13 (add on 2&5), Codebar, PostNET, DUN14, MaxiCode, HIBC, Plessey, RPS128, PDF417, Datamatrix, QR code
Resident Fonts	11 resident Windows bit mapped font. Scalable font in 4 orientations.
Graphic Handling	PCX, BMP files
Printer Language	ALL command, Firmware down loadable
Font Download	Windows Bitmap fonts and Asian fonts
Memory	8MB SDRAM, 4MB Flash
Software	Bartender Ultra Lite Plus, Windows drivers
LED Display	2 LED, 1 Function key
Power supply	External power supply 100/240VAC, 50/60Hz
Operating Temperature	5 to 40 centigrade
Humidity	30 to 85%, non-condensing. Free air
Approval	CE, FCC Class A, CCC, CB, CUL, BSMI
Dimensions	171mm H x 226mm W x 285mm D
Weight	2.7Kg
Options	Rotary cutter Stripper Module CF Card Adapter with RTC Internal Ethernet Adapter Card



RECOMMENDED APPLICATIONS

- TRANSPORTATION
- LOGISTICS
- COURIER & PARCEL SERVICES
- MANUFACTURING
- GARMENT SHOPS
- JEWELLERY SHOPS
- LIBRARIES & BOOK STORES
- HOSPITALS
- PARKING LOT
- RETAIL STORES

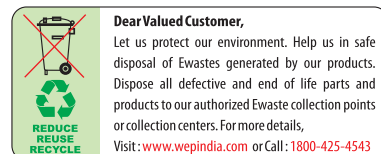

Dealer Name and Address



Billing Printers



POS Systems



Dot Matrix Printers



Laser Printers



High Speed DMPs



Passbook Printers



Line Matrix Printers



Scanners



ID Card Printers



Consumables

